

SK100TTs

istituto sperimentale per l'edilizia s.p.a.

ISTEDIL

Autorizzato all'esecuzione delle prove ai sensi e per gli effetti dell'Art. 20 della legge del 5-11-71 n. 1086 con Decreti Ministero LL. PP. Autorizzato alle certificazioni CE - Notificato CEE n. 0529

SEDE LEGALE - UFFICI E LABORATORI: 00012 Guidonia M. (Roma) Loc. Setteville - Via Tiburtina Km 18,300 - Tel. 0774/353580 r.a. - Fax 0774/353762

PERUGIA - 06132 S. Sisto Loc. S. Andrea delle Fratte - Via Maccheroni s.n.c. - Tel. 075/5271717 - Fax 075/5271705

LATINA SCALO - 04013 Loc. Tor Tre Ponti - Via Carrara, 12/a - Tel. 0773/630137 - Tel. e Fax 0773/630217

SASSARI - 07100 Loc. Predda Niedda - Strada 25 - Tel. e Fax 079/260581

www.istedil.it
E-mail: info@istedil.it

TEST REPORT n° 203/2006-E

Guidonia M. 11/05/2006

Results of calculation of thermal transmittance of frame profile, with numerical method, carried out on 03/05/2006.

Geometrical and structural characteristics of the test-piece are given in the attached description sheet, supplied by the Customer, which form an integral part of this test report.


CUSTOMER : STARPUR S.r.l.

DECLARED DATA

Product name : SW 180s side joint
Frame : ALUMINUM-WOOD

Thermal conductivity of materials:

Aluminum	160.000	W/m°K
EPDM	0.250	W/m°K
Soft Wood	0.130	W/m°K
Insulation panel	0.035	W/m°K

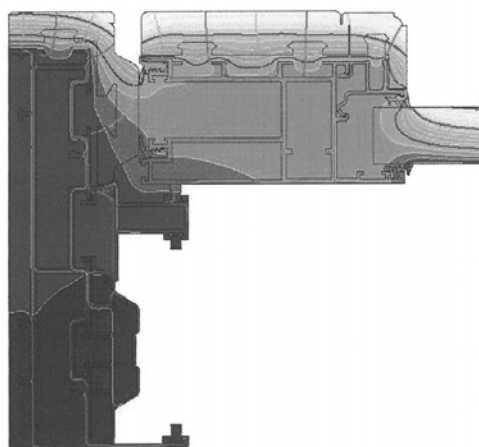

TEST PROCEDURE

Reference standard: UNI EN ISO 10077-2

Calculation program: PHISIBEL BISCO vers. 7.0w

TEST RESULTS

BISCO data file: sw180slaterale.bsc

THERMAL TRANSMITTANCE OF FRAME (UNI EN ISO 10077-2)

$$U_f = (Q/(t_i - t_e) - U_p * w_p) / w_f$$

with:

Q = 24.000 W/m [total heat flow (frame+panel)]

t_i = 20.00 °C [internal temperature]

t_e = 0.00 °C [external temperature]


U_p = 1.243 W/(m².K) [thermal transmittance of the insulation panel]

w_p = 0.4247 m [projected width of insulation panel]


w_f = 0.1578 m [projected width of frame]

THERMAL TRANSMITTANCE OF FRAME U_f = 4.26 W/m² K


TEST REPORT n° 203/2006-E

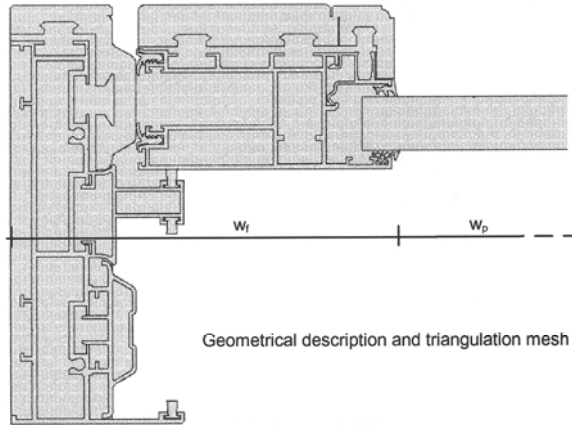

Geometrical description and triangulation mesh

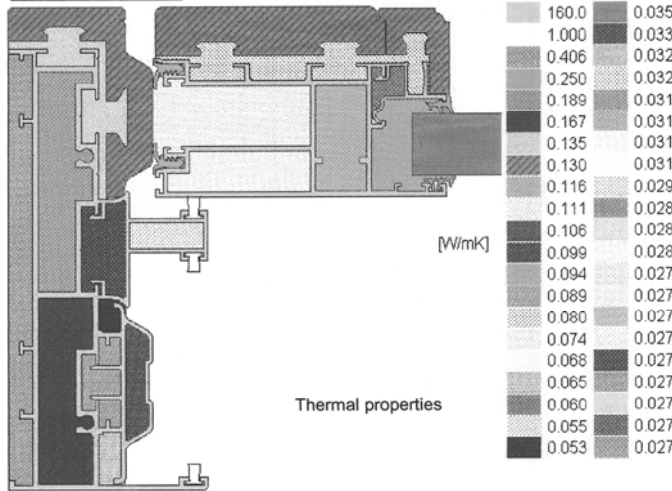

Thermal properties

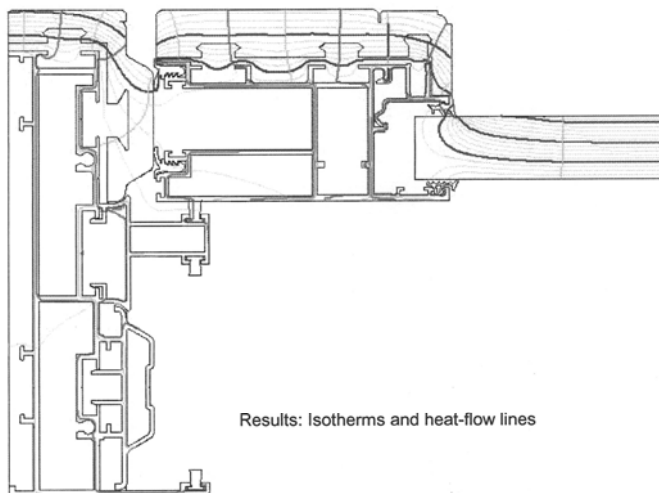

Results: Isotherms and heat-flow lines